



# Klippon® Connect

**Innovative ideas  
for panel building**  
Let's connect.

[www.klippon-connect.com](http://www.klippon-connect.com)

**Weidmüller** 



Let's connect.



# Terminal blocks Klippon® Connect

## Extra efficiency in planning, installation and operation

Whether it is simple handling, more space in the panel or time saving on installation: Klippon® Connect offers numerous benefits for your panel building process. Our completely restructured terminal block range includes a new PUSH IN terminal block family, the A-Series, with customised application products and services for the entire engineering process.

The universal range – flexible and versatile to use

The Klippon® Connect universal range is a complete range of standard products including all conventional connection technologies and functions.



max.		Wire-end ferrule with plastic collar		
with wire-end ferrules, finely stranded, crimped with plastic collar (see to DIN 46229 Part IV)				
Ø in mm	Order No.	Colour		
Ø 0.25	9025760000	●	●	
Ø 0.34	9025770000	●	●	
Ø 0.5	9025870000	●	●	
Ø 0.75	9025860000	○	○	

max.		Wire-end ferrule		
Finely stranded, crimped with wire-end ferrules (see to DIN 46229 Part I)				
Ø in mm	Order No.	Colour		
Ø 0.5	0690700000	○	○	
Ø 0.75	0462900000	○	○	

max.		Wire-end ferrule		
Finely stranded, crimped with wire-end ferrules (see to DIN 46229 Part I)				
Ø in mm	Order No.	Colour		
Ø 0.5	9025870000	●	●	
Ø 0.75	9025860000	○	○	
Ø 1.0	9025930000	●	●	
Ø 1.5	9019140000	●	●	
Ø 2.5	9019170000	●	●	

max.		Wire-end ferrule		
Finely stranded, crimped with wire-end ferrules (see to DIN 46229 Part I)				
Ø in mm	Order No.	Colour		
Ø 0.5	9025870000	●	●	
Ø 0.75	9025860000	○	○	
Ø 1.0	9025930000	●	●	
Ø 1.5	0635100000	●	●	
Ø 2.5	9019170000	●	●	

max.		Wire-end ferrule		
Finely stranded, crimped with wire-end ferrules (see to DIN 46229 Part I)				
Ø in mm	Order No.	Colour		
Ø 0.5	9025870000	●	●	
Ø 0.75	9025860000	○	○	
Ø 1.0	9025930000	●	●	
Ø 1.5	0635100000	●	●	
Ø 2.5	9019170000	●	●	

max.		Wire-end ferrule		
Finely stranded, crimped with wire-end ferrules (see to DIN 46229 Part I)				
Ø in mm	Order No.	Colour		
Ø 0.5	9025870000	●	●	
Ø 0.75	9025860000	○	○	
Ø 1.0	9025930000	●	●	
Ø 1.5	0635100000	●	●	
Ø 2.5	9019170000	●	●	

max.		Wire-end ferrule		
Finely stranded, crimped with wire-end ferrules (see to DIN 46229 Part I)				
Ø in mm	Order No.	Colour		
Ø 0.5	9025870000	●	●	
Ø 0.75	9025860000	○	○	
Ø 1.0	9025930000	●	●	
Ø 1.5	0635100000	●	●	
Ø 2.5	9019170000	●	●	

max.		Wire-end ferrule		
Finely stranded, crimped with wire-end ferrules (see to DIN 46229 Part I)				
Ø in mm	Order No.	Colour		
Ø 0.5	9025870000	●	●	
Ø 0.75	9025860000	○	○	
Ø 1.0	9025930000	●	●	
Ø 1.5	0635100000	●	●	
Ø 2.5	9019170000	●	●	

max.		Wire-end ferrule		
Finely stranded, crimped with wire-end ferrules (see to DIN 46229 Part I)				
Ø in mm	Order No.	Colour		
Ø 0.5	9025870000	●	●	
Ø 0.75	9025860000	○	○	
Ø 1.0	9025930000	●	●	
Ø 1.5	0635100000	●	●	
Ø 2.5	9019170000	●	●	

The application range – application specific and tailor-made


There are requirements in panel building that are an integral part of almost any area of use. We've closely examined them to make your work easier for you. The result of our efforts is our new, innovative Klippon® Connect application product range.

max.		Wire-end ferrule		
Finely stranded, crimped with wire-end ferrules (see to DIN 46229 Part I)				
Ø in mm	Order No.	Colour		
Ø 0.5	9025870000	●	●	
Ø 0.75	9025860000	○	○	
Ø 1.0	9025930000	●	●	
Ø 1.5	0635100000	●	●	
Ø 2.5	9019170000	●	●	




### Slim design

- High wiring density thanks to narrow 3.5 mm width
- Up to 4 different potentials on a terminal block




### Coloured pusher

- Separate colour for each conductor, plus, minus, signal or PE
- Quicker installation and avoidance of wiring mistakes




### Testing and checking point

- Consistent test and check point for each contact point
- Time-saving testing of different potentials in the panel

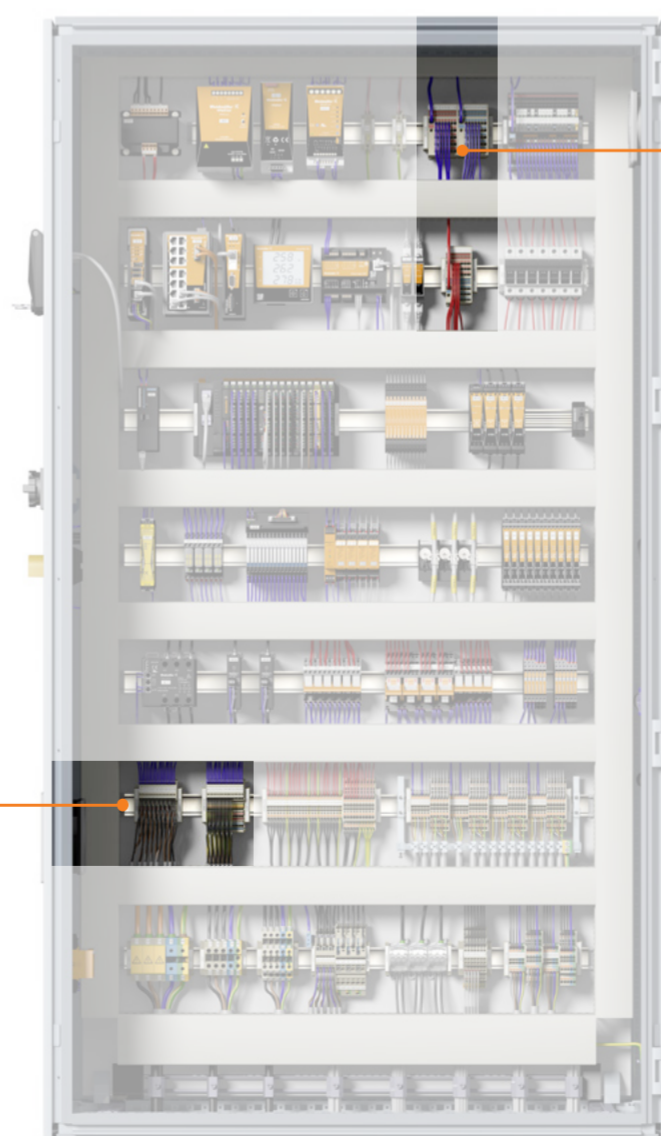

## Control voltage distribution




### Space saving

- Plus and minus potentials on one terminal
- Less space required than with conventional designs



### Cross-connectors

- Flexible potential distribution thanks to 2 consistent cross-connection channels
- Simplified adaptation and labelling of cross-connectors



### Coloured pusher

- Potentials are easy to tell apart
- Quicker installation and avoidance of wiring mistakes

max.		Wire-end ferrule		
Finely stranded, crimped with wire-end ferrules (see to DIN 46229 Part I)				
Ø in mm	Order No.	Colour		
Ø 0.5	9025870000	●	●	
Ø 0.75	9025860000	○	○	
Ø 1.0	9025930000	●	●	
Ø 1.5	0635100000	●	●	
Ø 2.5	9019170000	●	●	



2491200000/10/2016/SMKC

We cannot guarantee that there are no mistakes in the publications or software provided by us to the customer for the purpose of making orders. We try our best to quickly correct errors in our printed media.