


100Energy 1250A






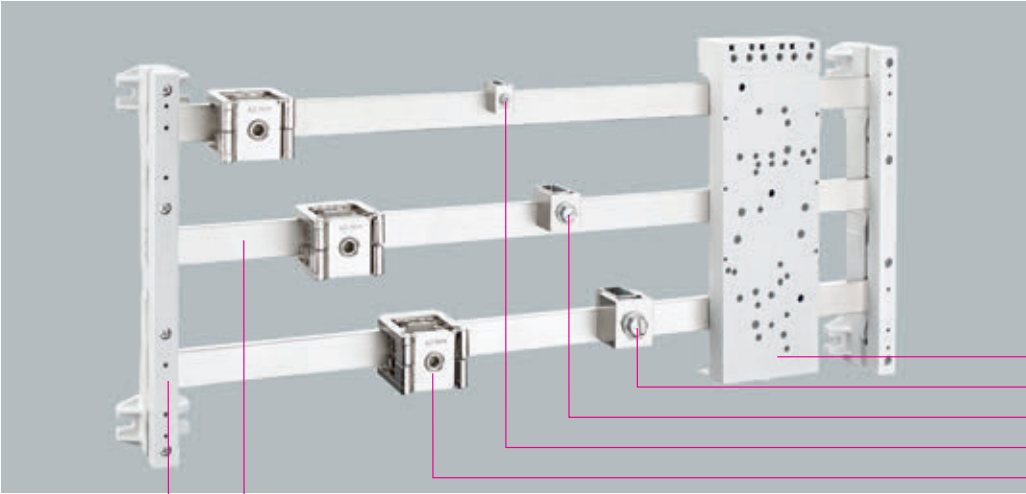


- 32 001
- 01 047
- 01 514
- 01 512
- 01 092
- 01 625
- 01 479

Universal busbar support, 100mm-System, 3-pole					
Type	Pack size	Weight		Part no.	
for undrilled flat busbars 30, 40, 50, 60 x 10	4	kg/100 u. 47.1		01 479	06
End cover					
end cover for 01 479	10	5.3		01 254	06
Busbar E-Cu, tin-plated, length 2.4m, shorter lengths on request					
Dimensions	Cross section	Pack size	Weight		Part no.
			kg/100 u.		
2400 x 30 x 10	300	1	643.2	01 625	06
2400 x 40 x 10	400	1	856.8	01 626	06
2400 x 50 x 10	500	1	1072.8	01 627	06
2400 x 60 x 10	600	1	1294.0	01 628	06
further cross sections see page 2/2 and 2/4					
Busbar cover, length 1m					
Type	Pack size	Weight		Part no.	
		kg/100 u.			
for 12 - 30 x 10 busbar	10	10.1		01 245	06
40 - 60 x 10	5	17.6		01 251	06
CRITO®, connecting terminal					
For busbars	Connection	For use	Pack size	Weight	Part no.
	min. - max.	up to max.		kg/100 u.	
30 x 10	95 - 300mm ²	630A	3	85.7	01 094 07
30 x 10	40 x 20	1250A	3	81.7	01 092 07
CRITO®, snap-on screw clamp connection, for cable lugs DIN 46 234					
Connection	Terminal space	For use	Pack size	Weight	Part no.
	W x H	up to max.		kg/100 u.	
for undrilled flat busbars, 10mm thick	M5 x 8	360A	25	5.0	01 512 07
for undrilled flat busbars, 10mm thick and double-T and triple-T section	M8 x 8	490A	20	16.5	01 514 07
	M10 x 10	630A	6	36.2	01 047 07
EQUES®100Energy, busbar adapter 200A, for 100mm system, with clamp connection 70mm²					
Type	Adapter	Adapter	Pack size	Weight	Part no.
	length	width		kg/100 u.	
mounting plate: plastic	315	108	1	87.7	32 001 05
for mounting options for DIN rails and various switching devices and product descriptions, see www.woehner.com					

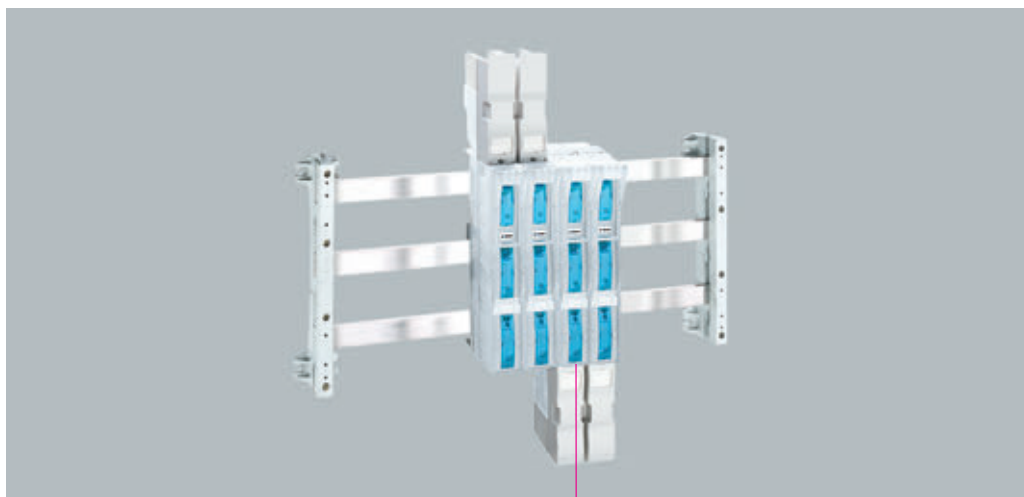

33 235

QUADRON®100Energy, NH fuse strip-type switch disconnecter Size 00, 3-pole switching, connection top/bottom						
Type	Rated current	Size	Pack size	Weight		Part no.
				kg/100 u.		
clamp 70mm ² / screw M8	160A	NH00	1	137.0		33 235 12
with terminal space cover, directly connectable in the 100mm-System						
QUADRON®100Energy, NH fuse strip-type switch disconnecter Size 00, 3-pole switching, connection top/bottom, with electronic fuse monitoring, 400V AC						
clamp 70mm ² / screw M8	160A	NH00	1	143.0		33 286 12
with terminal space cover, directly connectable in the 100mm-System, circuit diagram for fuse monitoring on page 9/25						
QUADRON®100Energy, NH fuse block 00, 3-pole						
wedge clamp terminal 70mm ²	160A	NH00	1	99.5		33 384 12
Accessories						
Type	Size	Pack size	Weight		Part no.	
			kg/100 u.			
terminal clamp 160A for assembly without drilling in the 100mm-System, on 10mm busbars		3	3.1		33 238	12
pilot switch for monitoring lid position	00-3	1	1.1		33 156	09
support angle for fixing front trims	00-3	4	0.5		33 113	12
trim strip, for 33 235 in the 100mm-System	00	2	5.3		33 036	12
Connection accessories						
clamp connection 1.5 - 70mm ² for Cu cond., rm, f +AE; la. Cu	00	3	1.5		03 727	09
screw connection M8	00	3	1.4		30 894	09
wedge clamp terminal for screw-clamp connection M8, Cu conductor 16 - 70mm ² rm, sm, f, f+AE, Al conductor 16 - 70mm ² rm, sm	00	3	3.0		33 224	09
* not maintenance-free if aluminium conductors are used (see page 8/2)						

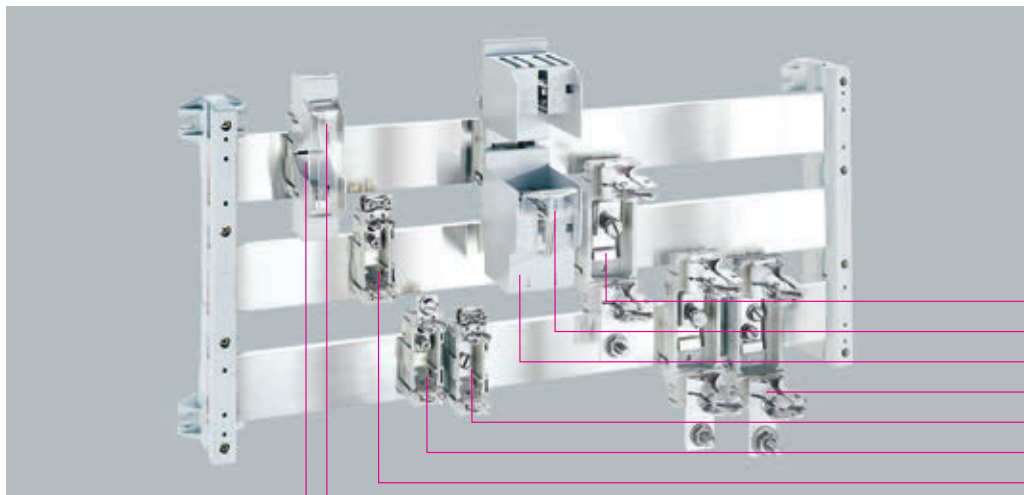

- 03 599
- 79 449
- 03 793
- 03 790
- 03 585
- 03 370
- 03 369
- 79 448
- 03 791

QUADRON®100Energy, NH bus-mounting fuse base Sizes 00 - 1 - 2						
Type	Rated current	Size	Pack size	Weight kg/100 u.	Part no.	
clamp 70mm ²	160A	NH00	10	14.9	03 369	10
screw M8	160A	NH00	10	14.2	03 370	10
screw M10	250A	NH1	3	54.0	03 384	10
screw M10	400A	NH2	3	75.8	03 599	10
1-pole, without shock protection, suitable for direct mounting on busbars						
QUADRON®100Energy, NH bus-mounting fuse base Sizes 00 - 1 - 2 - 3						
screw M8	160A	NH00	10	11.5	03 587	10
screw M10	250A	NH1	3	46.0	03 601	10
screw M10	400A	NH2	3	68.5	03 795	10
screw M12	630A	NH3	3	45.9	03 790	10
1-pole, without shock protection, for screwing onto drilled busbars						
Shock protection, for 1-pole NH bus-mounting fuse bases						
Type	Size	Pack size	Weight kg/100 u.	Part no.		
2 sections	00	10	3.5	03 791	10	
	1	3	12.6	03 792	10	
	2	3	17.1	03 793	10	
	3	3	21.0	03 794	10	
Grip lug cover, suitable for NH bases with shock protection						
grip lug cover, 1 unit required for each fuse		00	30	1.2	79 448	10
2 units required to cover a fuse		1-3	30	1.5	79 449	10

