


## AMAXX® combination unit - Part no. 922453



- switched, with mechanical DUO-interlock, fused with 1 RCD 30mA

|                         |                                          |
|-------------------------|------------------------------------------|
| Protection type         | IP 67                                    |
| Fitted with             | 1 CEE 16A, 5p, 400V                      |
| Fusing                  | 1 RCD 40A, 4p, 0.03A                     |
| Connection/feeder cable | for 1 cable up to 3 x 10 mm <sup>2</sup> |
| Enclosure size          | 260 x 225 mm (H x W)                     |
| Ampere                  | 16A                                      |
| Poles                   | 5p                                       |
| Voltage                 | 400V                                     |
| Hertz                   | 50-60Hz                                  |
| Earth position          | 6h                                       |
| Contact                 | standard                                 |
| Connection technology   | Screw terminals                          |

Std. Pack. 1 Qty.

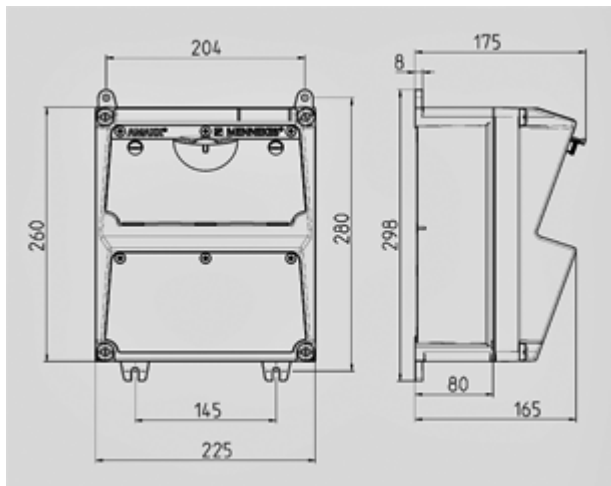

**Drawing 1 MB 521**

Depth dimensions at various fittings.

| Sockets           | Degrees | Depth  |
|-------------------|---------|--------|
| SCHUKO®16A, 230 V | IP 44   | 175 mm |
|                   | IP 67   | 194 mm |
| CEE 16A, 3p, 230V | IP 44   | 204 mm |
|                   | IP 67   | 205 mm |
| CEE 16A, 5p, 400V | IP 44   | 209 mm |
|                   | IP 67   | 213 mm |
| CEE 32A, 5p, 400V | IP 44   | 221 mm |
|                   | IP 67   | 227 mm |
| CEE 63A, 5p, 400V | IP 44   | 248 mm |
|                   | IP 67   | 248 mm |