

communication module PROFIBUS



Product brand name	SIRIUS
Product category	Communication modules
Product designation	Communication module
Design of the product	PROFIBUS
Manufacturer's article number	
• of soft starter	3RW51
• of soft starter	3RW52
• of soft starter	3RW55

General technical data	
Protection class IP	IP20
Reference code acc. to DIN EN 81346-2	A

Installation/ mounting/ dimensions	
Mounting position	any
Mounting type	screw fixing
Height	126 mm
Width	28 mm
Depth	82 mm
Installation altitude at height above sea level maximum	5 000 m; Derating as of 1000 m, see catalog

Weight without packaging	0.1 kg
--------------------------	--------

Ambient conditions

Ambient temperature	
• during operation	-25 ... +60 °C
• during storage and transport	-40 ... +80 °C
Environmental category	
• during operation acc. to IEC 60721	3K6 (no ice formation, only occasional condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices), 3M6
• during storage acc. to IEC 60721	1K6 (only occasional condensation), 1C2 (no salt mist), 1S2 (sand must not get inside the devices), 1M4
• during transport acc. to IEC 60721	2K2, 2C1, 2S1, 2M2 (max. height of fall 0.8 m)

General Product Approval	Declaration of Conformity	Test Certificates
--------------------------	---------------------------	-------------------



[Type Test Certificates/Test Report](#)

Marine / Shipping	other
-------------------	-------



[Confirmation](#)



Profibus

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RW5980-0CP00>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RW5980-0CP00>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RW5980-0CP00>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)



http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RW5980-0CP00&lang=en

Characteristic: Tripping characteristics, I_t, Let-through current

<https://support.industry.siemens.com/cs/ww/en/ps/3RW5980-0CP00/char>


Characteristic: Installation altitude

<http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RW5980-0CP00&objecttype=14&gridview=view1>

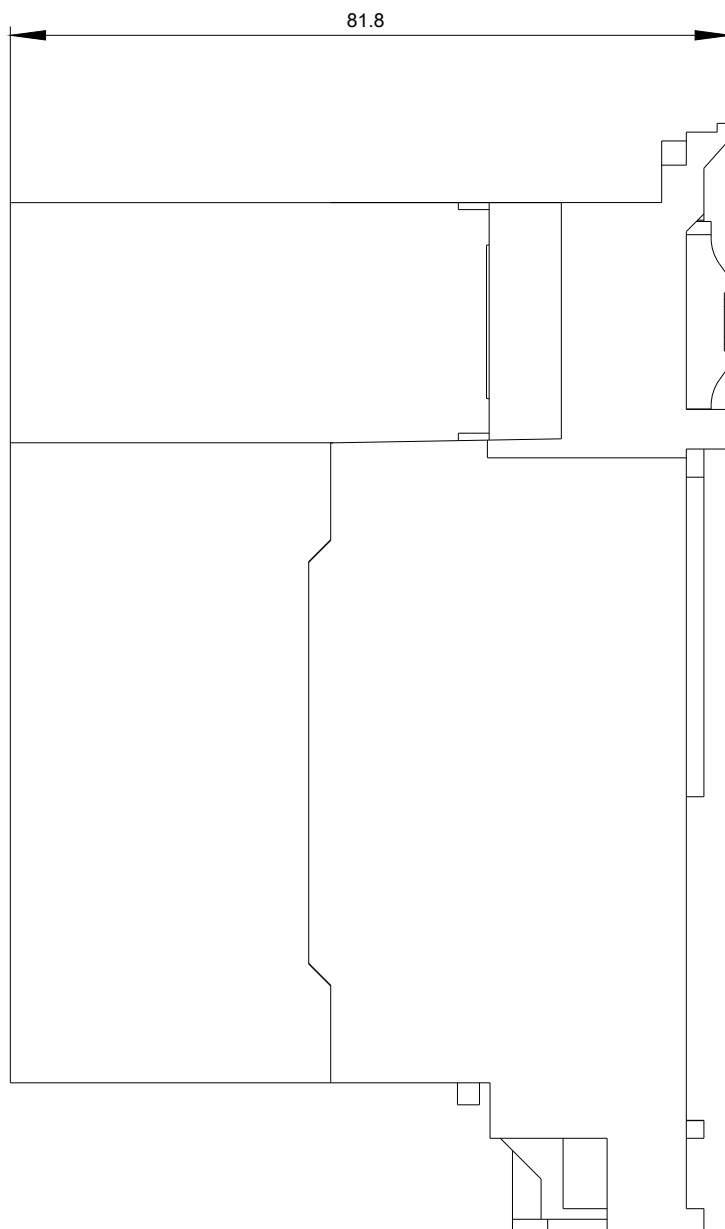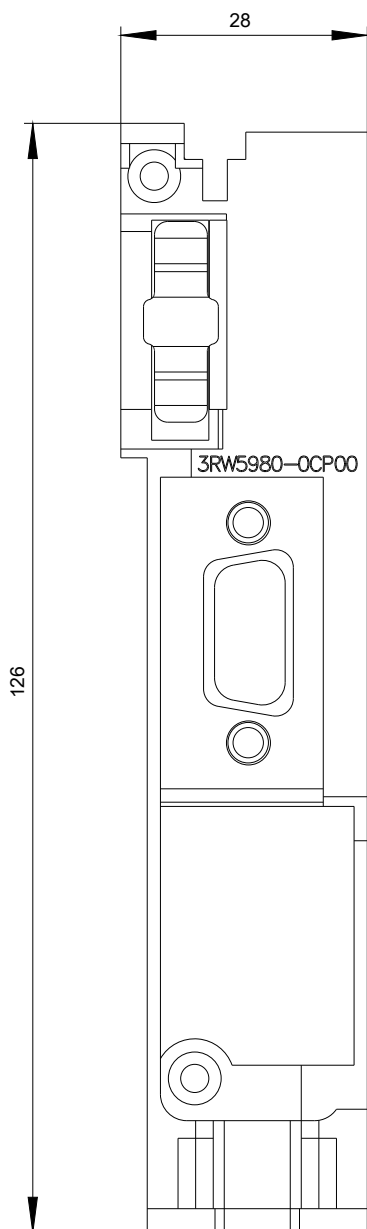

A

PROFIBUS DP

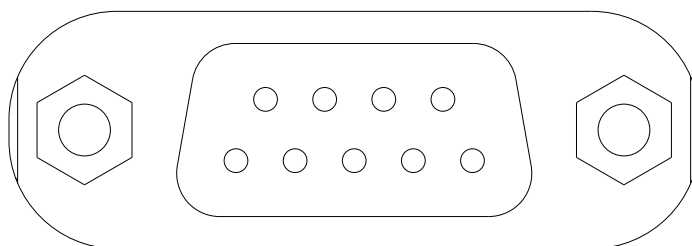

-X1:DP

last modified:

02/15/2019