

SIRIUS SOFT STARTER, VALUES WITH 460 V, 50 DEG., STANDARD: 215A, 150HP, INSIDE-DELTA CIRCUIT 3: 372A, 300HP, 200-460 V AC, 115 V AC, SCREW TERMINALS

General technical data:

| | | |
|---|--|--------|
| product brand name | | SIRIUS |
| Product feature | | |
| • integrated bypass contact system | | Yes |
| • Thyristors | | Yes |
| Product function | | |
| • Intrinsic device protection | | Yes |
| • motor overload protection | | Yes |
| • Evaluation of thermistor motor protection | | Yes |
| • External reset | | Yes |
| • Adjustable current limitation | | Yes |
| • inside-delta circuit | | Yes |
| Product component Motor brake output | | Yes |
| Equipment marking acc. to DIN EN 61346-2 | | Q |
| Equipment marking acc. to DIN 40719 extended according to IEC 204-2 acc. to IEC 750 | | G |

Power Electronics:

| | | |
|--|---|---|
| Product designation | | soft starters for high feature applications |
| Operating current | | |
| • at 40 °C Rated value | A | 250 |
| • at 50 °C Rated value | A | 215 |
| • at 60 °C Rated value | A | 185 |
| Operating current for three-phase motors at 3-phase root switching | | |
| • at 40 °C Rated value | A | 433 |

| | | |
|---|--------------|-------------|
| • at 50 °C Rated value | A | 372 |
| • at 60 °C Rated value | A | 320 |
| Mechanical power output for three-phase motors | | |
| • at 230 V | | |
| — at standard circuit at 40 °C Rated value | W | 75 000 |
| — at 3-phase root switching at 40 °C Rated value | W | 132 000 |
| • at 400 V | | |
| — at standard circuit at 40 °C Rated value | W | 132 000 |
| — at 3-phase root switching at 40 °C Rated value | W | 250 000 |
| yielded mechanical performance [hp] for three-phase AC motor at 200/208 V at standard circuit at 50 °C Rated value | metric hp | 60 |
| Operating frequency Rated value | Hz | 50 ... 60 |
| Relative negative tolerance of the operating frequency | % | -10 |
| Relative positive tolerance of the operating frequency | % | 10 |
| Operating voltage at standard circuit Rated value | V | 200 ... 460 |
| Relative negative tolerance of the operating voltage at standard circuit | % | -15 |
| Relative positive tolerance of the operating voltage at standard circuit | % | 10 |
| Operating voltage at 3-phase root switching Rated value | V | 200 ... 460 |
| Relative negative tolerance of the operating voltage at 3-phase root switching | % | -15 |
| Relative positive tolerance of the operating voltage at 3-phase root switching | % | 10 |
| Minimum load in % of I _M | % | 8 |
| Adjustable motor current for motor overload protection minimum rated value | A | 50 |
| Continuous operating current [% of I _e] at 40 °C | % | 115 |
| Active power loss at operating current at 40 °C during operation typical | W | 110 |

Control electronics:

| | | |
|---|----|-----|
| Type of voltage of the control supply voltage | | AC |
| Control supply voltage frequency 1 Rated value | Hz | 50 |
| Control supply voltage frequency 2 Rated value | Hz | 60 |
| Relative negative tolerance of the control supply voltage frequency | % | -10 |
| Relative positive tolerance of the control supply voltage frequency | % | 10 |
| Control supply voltage 1 with AC | | |
| • at 50 Hz Rated value | V | 115 |

| | | |
|--|---|---------|
| • at 60 Hz Rated value | V | 115 |
| Relative negative tolerance of the control supply voltage with AC at 60 Hz | % | -15 |
| Relative positive tolerance of the control supply voltage with AC at 60 Hz | % | 10 |
| Display version for fault signal | | Display |

| Mechanical data: | | |
|---|----|--|
| Width | mm | 210 |
| Height | mm | 230 |
| Depth | mm | 298 |
| Mounting type | | screw fixing |
| mounting position | | bei senkrechter Montageebene +/- 90° drehbar, bei senkrechter Montageebene +/- 22,5° nach vorne und hinten kippbar |
| Required spacing with side-by-side mounting | | |
| • upwards | mm | 100 |
| • at the side | mm | 5 |
| • downwards | mm | 75 |
| Installation altitude at height above sea level | m | 5 000 |
| Cable length maximum | m | 500 |
| Number of poles for main current circuit | | 3 |

| Connections/ Terminals: | | |
|---|--|-----------------------------|
| Type of electrical connection | | |
| • for main current circuit | | busbar connection |
| • for auxiliary and control current circuit | | screw-type terminals |
| Number of NC contacts for auxiliary contacts | | 0 |
| Number of NO contacts for auxiliary contacts | | 3 |
| Number of CO contacts for auxiliary contacts | | 1 |
| Type of connectable conductor cross-section for main contacts for box terminal using the front clamping point | | |
| • finely stranded with core end processing | | 70 ... 240 mm ² |
| • finely stranded without core end processing | | 70 ... 240 mm ² |
| • stranded | | 95 ... 300 mm ² |
| Type of connectable conductor cross-section for main contacts for box terminal using the back clamping point | | |
| • finely stranded with core end processing | | 120 ... 185 mm ² |
| • finely stranded without core end processing | | 120 ... 185 mm ² |
| • stranded | | 120 ... 240 mm ² |
| Type of connectable conductor cross-section for main contacts for box terminal using both clamping points | | |

| | | |
|--|--|--|
| <ul style="list-style-type: none"> • finely stranded with core end processing • finely stranded without core end processing • stranded | | min. 2x 50 mm ² , max. 2x 185 mm ² min. 2x 50 mm ² , max. 2x 185 mm ² max. 2x 70 mm ² , max. 2x 240 mm ² |
| Type of connectable conductor cross-section for AWG conductors for main contacts for box terminal <ul style="list-style-type: none"> • using the back clamping point • using the front clamping point • using both clamping points | | 250 ... 500 kcmil 3/0 ... 600 kcmil min. 2x 2/0, max. 2x 500 kcmil |
| Type of connectable conductor cross-section for DIN cable lug for main contacts <ul style="list-style-type: none"> • finely stranded • stranded | | 50 ... 240 mm ² 70 ... 240 mm ² |
| Type of connectable conductor cross-section for auxiliary contacts <ul style="list-style-type: none"> • solid • finely stranded with core end processing | | 2x (0.5 ... 2.5 mm ²) 2x (0.5 ... 1.5 mm ²) |
| Type of connectable conductor cross-section for AWG conductors <ul style="list-style-type: none"> • for main contacts • for auxiliary contacts • for auxiliary contacts finely stranded with core end processing | | 2/0 ... 500 kcmil 2x (20 ... 14) 2x (20 ... 16) |

Ambient conditions:

| | | |
|--|----|-------------|
| Ambient temperature | | |
| <ul style="list-style-type: none"> • during operation | °C | 60 |
| <ul style="list-style-type: none"> • during storage | °C | -25 ... +80 |
| Derating temperature | °C | 40 |
| Protection class IP | | IP00 |

Certificates/ approvals:

| | | |
|--------------------------|-----|---------------------------|
| General Product Approval | EMC | Declaration of Conformity |
|--------------------------|-----|---------------------------|



| | |
|-------------------|-------------------|
| Test Certificates | Shipping Approval |
|-------------------|-------------------|

[Type Test
Certificates/Test
Report](#)

[Special Test
Certificate](#)



| | |
|-------------------|-------|
| Shipping Approval | other |
|-------------------|-------|



[Environmental
Confirmations](#)

UL/CSA ratings:

yielded mechanical performance [hp] for three-phase
AC motor

- at 200/208 V

- at 3-phase root switching at 50 °C Rated value

metric
hp 125

- at 220/230 V

- at standard circuit at 50 °C Rated value

metric
hp 75

- at 3-phase root switching at 50 °C Rated value

metric
hp 150

- at 460/480 V

- at standard circuit at 50 °C Rated value

metric
hp 150

- at 3-phase root switching at 50 °C Rated value

metric
hp 300

Contact rating of the auxiliary contacts acc. to UL

B300 / R300

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)



<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrymall>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RW44446BC34>

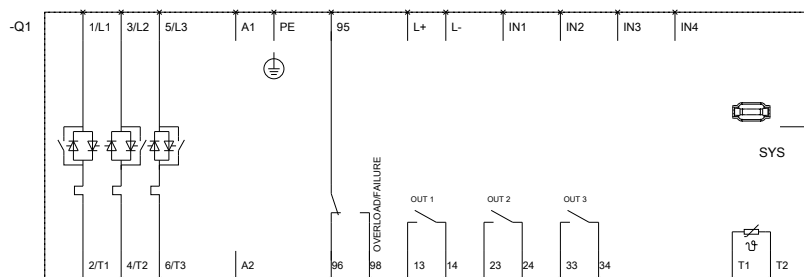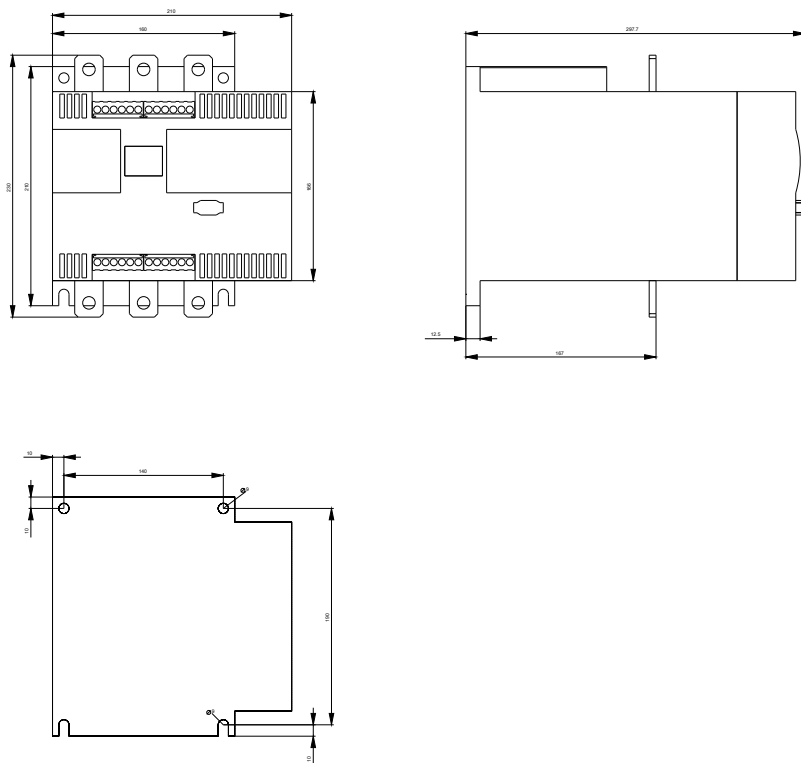

last modified:

27.04.2015