



INDICATOR LIGHT, 22MM, ROUND, PLASTIC, AMBER, SMOOTH LENS

Figure similar

|                       |                                  |
|-----------------------|----------------------------------|
| product brand name    | SIRIUS ACT                       |
| Product designation   | Commanding and signaling devices |
| Design of the product | Pilot Light                      |

### Actuator:

|                                         |          |
|-----------------------------------------|----------|
| Color                                   |          |
| • of the actuating element              | Amber    |
| Material of the actuating element       | plastic  |
| Shape of the actuating element          | round    |
| Outer diameter of the actuating element | 29.45 mm |

### Front ring:

|                              |    |
|------------------------------|----|
| Product component front ring | No |
|------------------------------|----|

### General technical data:

|                          |                         |
|--------------------------|-------------------------|
| Vibration resistance     |                         |
| • acc. to IEC 60068-2-6  | 10 ... 500 Hz: 5g       |
| Protection class IP      | IP66, IP67, IP69(IP69K) |
| Equipment marking        |                         |
| • acc. to DIN EN 61346-2 | P                       |
| • acc. to DIN EN 81346-2 | P                       |

### Ambient conditions:

|                                                           |                    |
|-----------------------------------------------------------|--------------------|
| Ambient temperature                                       |                    |
| • during operation                                        | -25 ... +70 °C     |
| • during storage                                          | -40 ... +80 °C     |
| Environmental category during operation acc. to IEC 60721 | 3K6, 3C3, 3S2, 3M6 |

#### Installation/ mounting/ dimensions:

|                                   |         |
|-----------------------------------|---------|
| Height                            | 29.5 mm |
| Width                             | 29.5 mm |
| Shape of the installation opening | round   |
| Mounting diameter                 | 22 mm   |
| Mounting height                   | 11.8 mm |
| Installation width                | 29.5 mm |
| Installation depth                | 24.4 mm |

#### Certificates/ approvals:

#### Further information

##### Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

##### Industry Mall (Online ordering system)

<http://www.siemens.com/industrymall>

##### Cax online generator


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3SU10016AA000AA0>

##### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


<https://support.industry.siemens.com/cs/ww/en/ps/3SU10016AA000AA0>

##### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3SU10016AA000AA0&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3SU10016AA000AA0&lang=en)

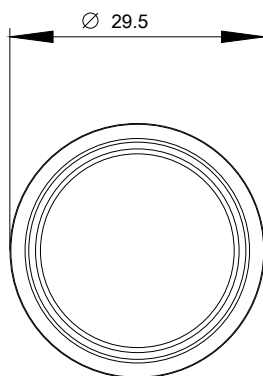

last modified:

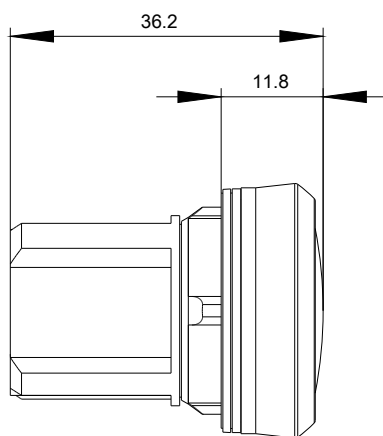

02.06.2015