



SETRON PAC3200; LCD; 96X96MM POWER MONITORING DEVICE PANEL MOUNT TYPE FOR MEASUREMENT OF ELECTR. VALUES VAUX: 22-65VDC VIN: MAX. 500/289V; 45-65HZ AMPIN: X/1A OR X/5A AC COMPRESSION TYPE TERMINALS

Model		
product brand name		SETRON
Product designation		multimeter
Design of the product		basic
Product type designation		PAC3200
Type of measured value detection		complete
Design of the power supply		Extra-low voltage power supply unit
General technical data		
Cutout width	mm	92
Cutout height	mm	92
Size of Power Monitoring Device / company-specific		size 96
Operating mode for measured value detection		
• automatic line frequency detection		Yes
• set at 50 Hz		No
• set to 60 Hz		No
Pulse duration		
• initial value	ms	30
• Full-scale value	ms	500
Voltage curve		Sinusoidal or distorted
Measurable line frequency / initial value	Hz	45
Measurable line frequency / Full-scale value	Hz	65
Measuring procedure / for voltage measurement		RMS
MTBF	y	185.8
Equipment marking / acc. to DIN 40719 extended according to IEC 204-2 / acc. to IEC 750		P

<b>Voltage</b>		
Measurable current / 1 / with AC / Rated value	A	1
Measuring procedure / for current measurement		TRMS
<b>Supply voltage</b>		
Supply voltage frequency / Rated value		
• minimum	Hz	45
• maximum	Hz	65
Type of voltage / of the supply voltage		DC
Measuring category / for supply voltage		CATIII
Apparent power consumption		
• with expansion module / maximum	V·A	8
• without expansion module / typical	V·A	6
Relative symmetrical tolerance / of the supply voltage	%	10
<b>Protection class</b>		
Protection class IP		
• on the front		IP65
• Rear side		IP20
Operating resource protection class / when installed		II
<b>Electricity</b>		
Short-time current resistance (I <sub>cw</sub> ) / limited to 1 s / Rated value	A	100
Measurable current / 2 / with AC / Rated value	A	5
<b>Suitability</b>		
Suitability for operation		Installation in stationary control panels in closed rooms
Adjustable time period / minimum	ms	10
<b>Product function</b>		
Product function		
• reactive power measurement		Yes
• frequency measurement		Yes
• pulse measurement		Yes
• voltage measurement		Yes
• Current measurement		Yes
• active power measurement		Yes
<b>Display and operation</b>		
Design of the display		LCD, graphical, monochrome
Number of keys		4
Color / of the background of the display		white
National language / on the display screen / is supported		ger, en, fr, spa, ita, por, tur, chi

Horizontal image resolution		128
Vertical screen resolution		96
<b>Communication</b>		
<b>Refresh time / at the interface</b>		
• minimum	s	0.33
• maximum	s	1
<b>Design of cable / connectable / Twisted pair</b>		Yes
<b>Protocol</b>		
• at the Ethernet interface / is supported		MODBUS TCP
• is supported		SEAbus TCP / MODBUS TCP (switchable)
<b>Transfer rate</b>		
• minimum	kbit/s	10 000
• maximum	kbit/s	10 000
<b>Fault limits</b>		
<b>Reference condition / for metering accuracy</b>		Acc. to IEC62053-22 and IEC62053-23
<b>Formula for relative total measurement inaccuracy</b>		
• for measured variable reactive energy		Class 2 according to IEC61557-12 and/or IEC62053-23
• for measured variable output		+/- 0,5 %
• for measured variable output factor		+/- 0,5 %
• for measured variable voltage		+/- 0,3 %
• for measured variable current		+/- 0,2 %
• for measured variable active energy		Cl. 0.5 acc. to... IEC62053-22
<b>Inputs Outputs</b>		
<b>Input voltage / at digital input</b>		
• initial value for signal<1>-recognition	V	13
• for DC / Rated value	V	24
• Full-scale value for signal<0> recognition	V	8
<b>Number of digital outputs</b>		1
<b>Number of digital inputs</b>		1
<b>Digital output version</b>		switching or pulse output function
<b>Input current / at digital input</b>		
• for signal <1>	mA	7
<b>Output current</b>		
• at digital output / with signal <0> / maximum	mA	0.2
• at digital output / for signal <1> / maximum	mA	27
• at digital output / for signal <1> / minimum	mA	10
• at the digital outputs / for DC / maximum	mA	100
<b>Output delay / at digital output</b>		
• for signal <0> to <1> / maximum	ms	5
• for signal <1> to <0> / maximum	ms	5

Operating voltage / as output voltage / for DC / maximum permissible	V	30
Property of the output / Short-circuit proof		Yes
Input delay time / at digital input		
• for signal <0> to <1> / maximum	ms	5
• for signal <1> to <0> / maximum	ms	5
Internal resistance / at the digital outputs	$\Omega$	55
Measuring category / for digital signals		CATII
Switching frequency / at digital output / maximum	Hz	17
Transfer rate / 1 / for fast Ethernet	Mbit/s	10

#### Measuring inputs

Outer conductors and neutral conductors internal resistance / for voltage measurement	M $\Omega$	1.05
Measurable supply voltage		
• between (PE)N and L / with AC / minimum	V	40
• between (PE)N and L / with AC / maximum	V	346
• between (PE)N and L / with AC / maximum rated value	V	289
• between the outer conductors / with AC / minimum	V	70
• between the outer conductors / with AC / maximum	V	600
• between the outer conductors / with AC / maximum rated value	V	500
Measuring category / for voltage measurement		CATIII
Supply voltage / between the outer conductors / with AC / maximum permissible	V	600
Active power consumption / for current measurement / per phase	mW	115
Continuous current / with AC / maximum permissible	A	10
Current measuring range extension / with external current transformers		Yes
Measuring category / for current measurement		CATIII
Zero-point suppression / for current measurement		0,1 ... 10 %
Relative measurable current / with AC		
• minimum	%	1
• maximum	%	120

#### Connections

<ul style="list-style-type: none"> <li>Type of connectable conductor cross-section / at the digital inputs <ul style="list-style-type: none"> <li>— for AWG conductors / solid</li> <li>— solid</li> <li>— finely stranded / with core end processing</li> </ul> </li> </ul>		2x 24 ... 18 1x (0.2 ... 2.5 mm <sup>2</sup> ), 2x (0.2 ... 1.0 mm <sup>2</sup> ) 1x (0.25 ... 2.5 mm <sup>2</sup> ), 2x (0.25 ... 1.0 mm <sup>2</sup> )
--	--	--

- Type of connectable conductor cross-section / at the digital outputs
  - for AWG conductors / solid
  - solid
  - finely stranded / with core end processing
- Type of connectable conductor cross-section / at the inputs for supply voltage
  - for AWG conductors / solid
  - solid
  - finely stranded / with core end processing
- Type of connectable conductor cross-section
  - at the measurement inputs for voltage
    - for AWG conductors / solid
    - solid
    - finely stranded / with core end processing
  - at the measurement inputs for current
    - for AWG conductors / solid
    - solid
    - finely stranded / with core end processing

2x 24 ... 18  
 1x (0.2 ... 2.5 mm<sup>2</sup>), 2x (0.2 ... 1.0 mm<sup>2</sup>)  
 1x (0.25 ... 2.5 mm<sup>2</sup>), 2x (0.25 ... 1.0 mm<sup>2</sup>)

2x 20 to 14  
 1x (0.5 ... 4 mm<sup>2</sup>), 2x (0.5 ... 2.5 mm<sup>2</sup>)  
 1x (0.5 ... 2.5 mm<sup>2</sup>), 2 (0.5 ... 1.5 mm<sup>2</sup>)

2x 20 to 14  
 1x (0.5 ... 4 mm<sup>2</sup>), 2x (0.5 ... 2.5 mm<sup>2</sup>)  
 1x (0.5 ... 2.5 mm<sup>2</sup>), 2x (0.5 ... 1.5 mm<sup>2</sup>)

2x 20 to 14  
 1x (0.5 ... 4 mm<sup>2</sup>), 2x (0.5 ... 2.5 mm<sup>2</sup>)  
 1x (0.5 ... 2.5 mm<sup>2</sup>), 2x (0.5 ... 1.5 mm<sup>2</sup>)

## Mechanical Design

<b>Height</b>	mm	96
Height / of the display	mm	54
<b>Width</b>	mm	96
<b>Width</b>		
• of the display	mm	72
<b>Depth</b>	mm	56
<b>mounting position</b>		vertical
<b>Installation depth</b>	mm	51
Mounting type / panel mounting		Yes





## Environmental conditions

<b>Installation altitude / at height above sea level / maximum</b>	m	2 000
<b>Standard</b>		
• for EMC for industrial sector		IEC 61000-6-2 respectively IEC 61326-1:2005, table 2
• for EMC against unloading		IEC 61000-4-2: 2001-04
• for EMC against high frequency fields		IEC 61000-4-3: 2006-02
• for EMC against conducted LF disturbance variables (industry)		IEC 61000-6-4, Group 1 Klasse A / CISPR11 Gruppe 1 Klasse A FCC Part 15 Subpart B Class A


<ul style="list-style-type: none"> <li>• for EMC against conducted disturbance variables via HF fields</li> <li>• for EMC against magnetic fields with power engineering frequencies</li> <li>• for EMC against quick, transient electrical disturbances</li> <li>• for EMC against voltage drops and interruptions</li> <li>• for EMC against surge voltages</li> <li>• for free fall</li> <li>• for pulse emitter</li> <li>• for cyclic, environmental damp heat check</li> <li>• for environmental coldness check</li> <li>• for environmental dry heat check</li> </ul>		IEC 61000-4-6: 2001-12  IEC 61000-4-8: 2001-03  IEC 61000-4-4: 2005-07  IEC 61000-4-11: 2004-03  IEC 61000-4-5: 2001-12 IEC 60068-2-32: 1975 according to IEC62053-31 IEC 60068-2-30 IEC 60068-2-1 IEC 60068-2-2
<b>Relative humidity / at 25 °C / without condensation / during operation</b>		
<ul style="list-style-type: none"> <li>• minimum</li> <li>• maximum</li> </ul>	% %	5 95
<b>Ambient temperature</b>		
<ul style="list-style-type: none"> <li>• during operation / minimum</li> <li>• during operation / maximum</li> <li>• during storage / minimum</li> <li>• during storage / maximum</li> </ul>	°C °C °C °C	-10 55 -25 70

## Certificates

<b>Certificate of suitability</b>		
<ul style="list-style-type: none"> <li>• as EC declaration of conformity</li> <li>• as approval for Canada</li> <li>• as approval for USA</li> </ul>		IEC 61010-1: 2001 (2nd Ed.) with Corr. 1, EN 61010-1: 2001 (2nd Ed.) and DIN EN 61010-1:2002 with "Berichtigung 1"  UL 61010-1, 2nd Ed. CAN/CSA-C22.2 NO. 61010-1-04  UL 61010-1, 2nd Ed. CAN/CSA-C22.2 NO. 61010-1-04
Equipment marking / acc. to DIN EN 61346-2		P

General Product Approval		EMC	Declaration of Conformity	other
<b>CB</b> CB	 UL		 C-TICK	 EG-Konf.

[Confirmation](#)

other	
 Profibus	<a href="#">PROFINET-Certification</a> <a href="#">Pattern Approval</a>

## Further information

**Information- and Downloadcenter (Catalogs, Brochures,...)**

<http://www.siemens.com/lowvoltage/catalogs>

**Industry Mall (Online ordering system)**

<https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/7KM21111BA003AA0>

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**

<http://support.automation.siemens.com/WW/view/en/7KM21111BA003AA0/all>

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)**


[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=7KM21111BA003AA0](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=7KM21111BA003AA0)


**CAX-Online-Generator**

<http://www.siemens.com/cax>

**Tender specifications**

<http://ausschreibungstexte.siemens.com/tiplv>

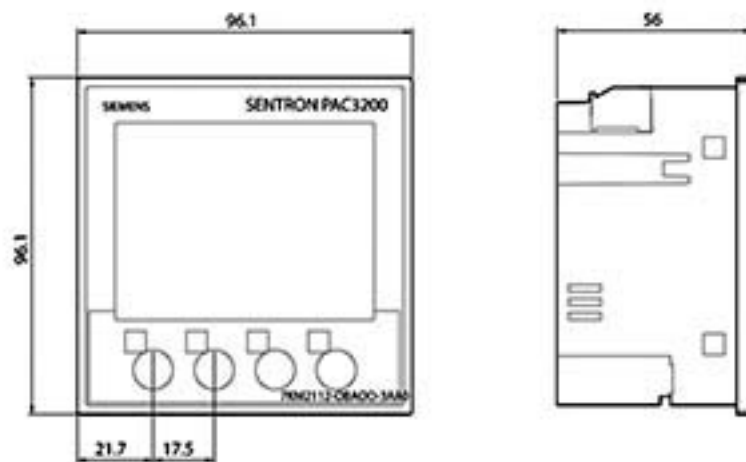

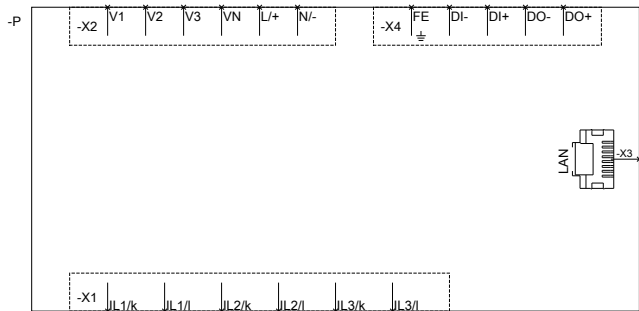

6ES7 311-1CG03-0AB0

last modified:

27.04.2015

6ES7 311-1CG03-0AB0