


adapter 200 A (32 214)

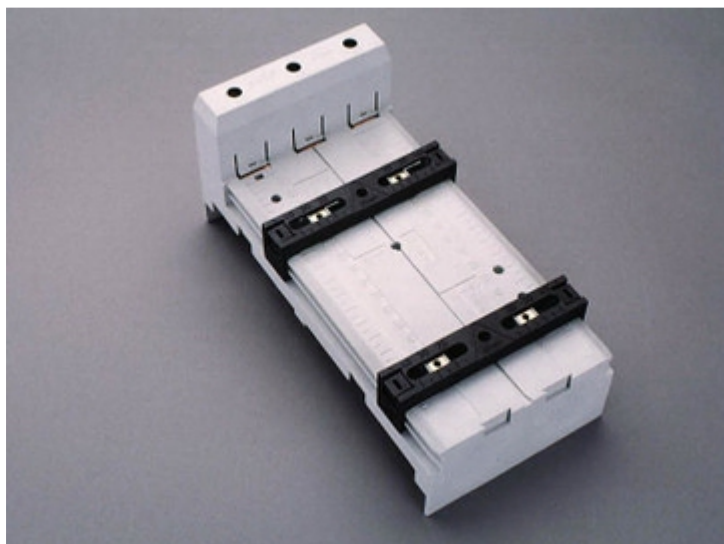

Description

Article

Part No.: 32 214
EQUES® 60Classic
adapter 200 A
terminals 70 mm² at top
108 x 222

System

60Classic

Product group 05

Subgroup 36

pack size 1

EAN 4021267322144

Catalog page 2015 : 2/17

eCl@ss 6.1 27370304
eCl@ss 7.1 27370304
ETIM 4.0 EC001531
ETIM 5.0 EC001531

Approvals

Standards

IEC 61439-1:2011

Approvals

CSA, UL, Germanischer Lloyd



Type number: 60200

UL file: E123577, UL category (for USA): NMTR2 <http://www.ul.com>

UL file: E123577, UL category (for Canada): NMTR8 <http://www.ul.com>

CSA file: 110285, CSA class: 3211-37 <http://directories.csa-international.org>

CCC approval: no certification required

Product data

Electrical data

Rated current (IEC): 200 A

Rated voltage (IEC) AC: 690 V

Rated current (UL): 200 A

Rated voltage (UL) AC: 600 V

Power dissipation:

The power dissipation at a typical load of 80% of the rated current results to 10.6 W.

(The power dissipation for operation with rated current would be 16.6 W.)

rated isolation voltage U_i (AC): 800 V

Rated surge voltage U_{imp} : 6 kV

max. permitted voltage (IEC) AC: 800 V

max. permitted voltage (IEC) DC: 800 V

rated peak withstand current I_{pk} : 46.9 kA

Mechanical data

W x H x D: 108 x 222 x 39

Weight: 84.2 kg/100

Poles: 3-pole


Material properties

Body: temperature stability 125°C,
self-extinguishing in acc. to UL 94,
creepage resistance CTI 200,
halogen-free

Reference

Movable fastening rails with M4 slide nuts for safe mounting of the switching devices.

Accessories



32 937

slide nut M5

for 32 168, 32 214, 32 215, 32 216